



HDSGF-26





HDSGF-49

STANDARD FEATURES



- Durable stainless steel top, interior walls, floor and ceiling. Exterior construction is attractive corrosion resistant vinyl on steel in black finish.
- Refrigeration system keeps the glasses/plates at safe temperatures between -5°F and 2°F (-20°C to -16°C).
- Adjustable coated-steel dividers included.
- Option of stainless steel exterior available.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Slide out refrigeration condensing unit makes it easy to access condenser for cleaning and service.
- These units use HYDRO-CARBON R290 refrigerant, which is environmentally friendly and more efficient than R134a/R404a refrigerant.



HDSGF-26

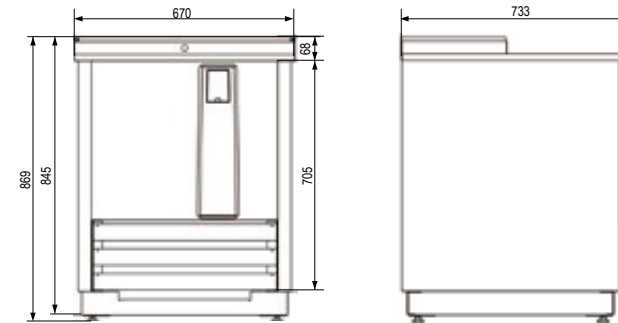

HDSGF-49

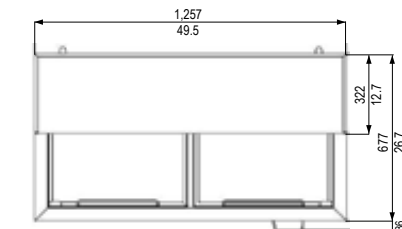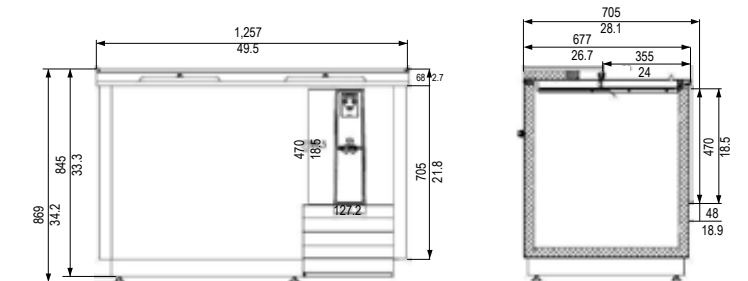

MODEL	LIDS	DIMENSIONS	CAPACITY		HP	AMPS	VOLTAGE	PLUG TYPE
			8" (204mm)	10 oz.				
HDSGF-26	1	26 3/8 x 28 3/8 x 34 1/4 in 670 x 713 x 869 mm	90 mugs	85 steins	1/5	2.04	115/60/1	NEMA 5-15P
HDSGF-49	2	49 1/2 x 26 5/8 x 34 1/4 in 1257 x 713 x 869 mm	250 mugs	240 steins	1/4+	2.28	115/60/1	NEMA 5-15P

sales@heavydutysystems.com

Voltage 220/50/1 available.