



HDSICSM-320 / HDSICSM-620



**CRESCENT ICE**


**STANDARD FEATURES**




- Intuitive Diagnostics and Controls - For ease of maintenance, a built-in diagnostic system will identify problems that your ice machine may be having and will display the issue on the digital controller so it can be repaired accordingly.
  - This easy-to-use controller can also be used to monitor the current stage of ice production that your machine is in. It also allows you to adjust the thickness of the ice, so that you can produce ice to your exact requirements, and initiate the cleaning cycle (and displays what stage of the cycle you're in).
- Stainless Steel Construction - Constructed of durable type 304 stainless steel with a polyethylene interior, HDS ice machines are built to last in the busiest commercial environments. They are also non-corrosive, making them ideal for settings that are high in moisture and humidity.
- Included Ice Scoop & Blue LED Lights - Included with each unit is an ice scoop and a hook to hang it on, so it is always within convenient reach when you need it. Blue LED Lights illuminate the interior of the ice bin, providing a clear view of the ice. This makes it easier to monitor ice levels and scoop out the ice.
- Adjustable Legs - With (4) 6" adjustable legs, you can level your machine on uneven surfaces and have plenty of room to clean under it.
- Side-Breathing with Rear Exhaust - The HDS ice machines are designed for side-breathing and rear exhaust, so you can avoid hot air being blown outward into your kitchen or service area.
- Included Single-Stage Water Filter - Included with each HDS ice machine is a single-stage water filter that will filter contaminants, and ensure your unit produces high quality ice.
- Air Cooled, Self-Contained Condensor
- Refrigerant Options - All models available in R404A refrigerant setup. Select models available in R290 refrigerant setup.
- Electrical Setup Options - All models above with ice production capacity above 500 lbs/24 hrs are available only in 208-240/50 or 60/1. Three-phase electrical setup may be available upon request.



HDSICSM-930 / HDSICSM-1230

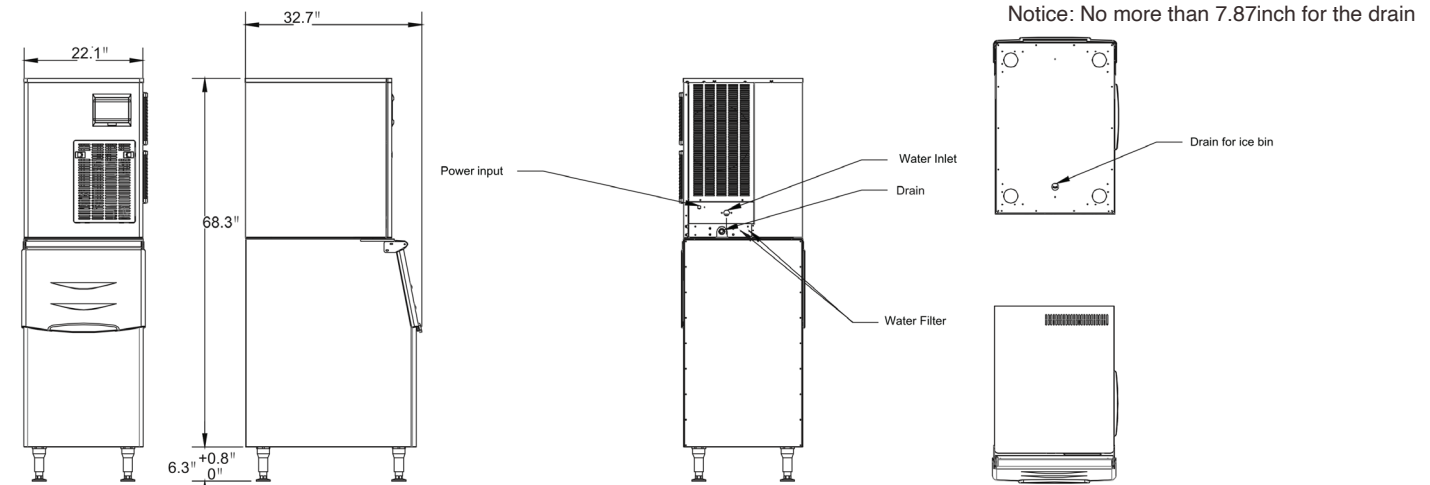

HDSICSM-320 / HDSICSM-620

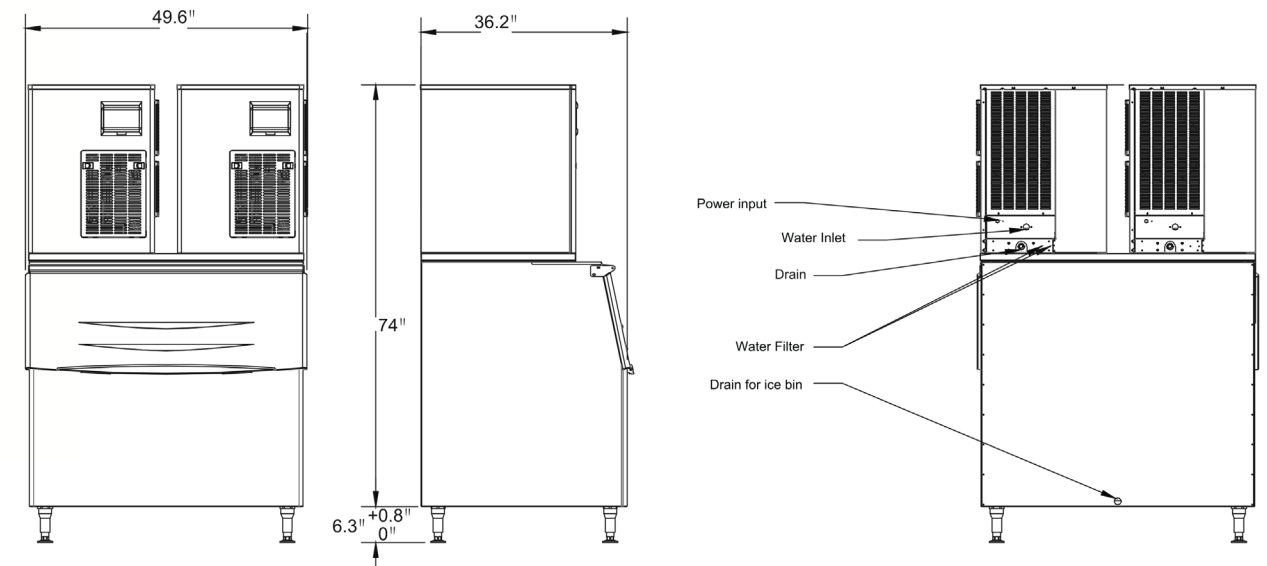

HDSICSM-930 / HDSICSM-1230

MODEL	ICE PRODUCTION	ICE STORAGE	GROSS WEIGHT	POWER	DIMENSION
HDSICSM-320	145kg/320lbs/24h	125kg/275lbs	118kg/260lbs	717W	562 x 830 x 1897mm / 22.1 x 32.7 x 74.7in
HDSICSM-620	280kg/620lbs/24h	125kg/275lbs	131kg/289lbs	1314W	562 x 830 x 1897mm / 22.1 x 32.7 x 74.7in
HDSICSM-930	425kg/937lbs/24h	350kg/775lbs	269kg/593lbs	2031W	1225 x 919 x 2041mm / 48.2 x 36.2 x 80.4in
HDSICSM-1230	560kg/1235lbs/24h	350kg/775lbs	282kg/622lbs	2628W	1225 x 919 x 2041mm / 48.2 x 36.2 x 80.4in

sales@heavydutysystems.com

Ice Production Data at 70°F (21°C) ambient temp. and 50°F (10°C) water temp.