



HDSBC-26



HDSBC-49 / HDSBC-64




HDSBC-95

STANDARD FEATURES


- Durable stainless steel top, interior walls, floor and ceiling.
- Exterior construction is attractive corrosion resistant vinyl on steel in black finish.
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 41°F (0.5°C to 3.3°C).
- Removable bottle cap opener and cap catcher included.
- Option of stainless steel exterior available.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Slide out refrigeration condensing unit makes it easy to access condenser for cleaning and service.
- Adjustable coated-steel dividers included.
- These units use HYDRO-CARBON R290 refrigerant, which is environmentally friendly and more efficient than R134a/R404a refrigerant.




HDSBC-26

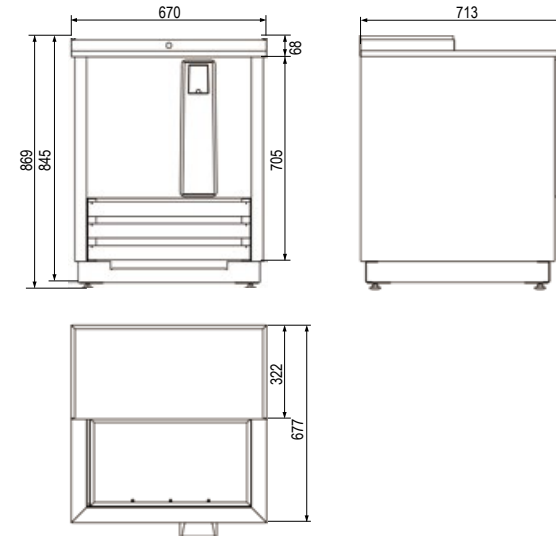


HDSBC-64

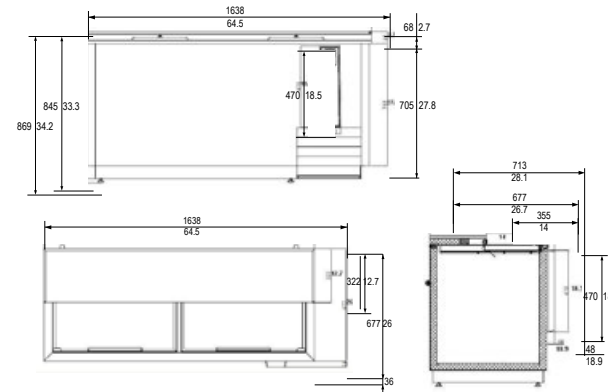

HDSBC-49

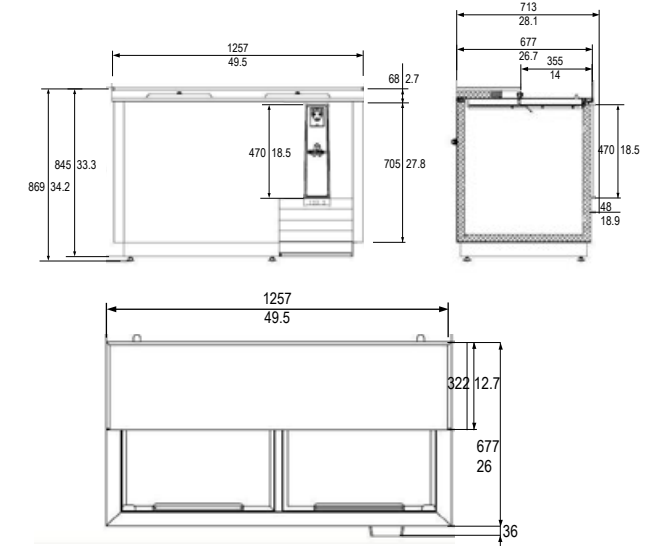

HDSBC-95

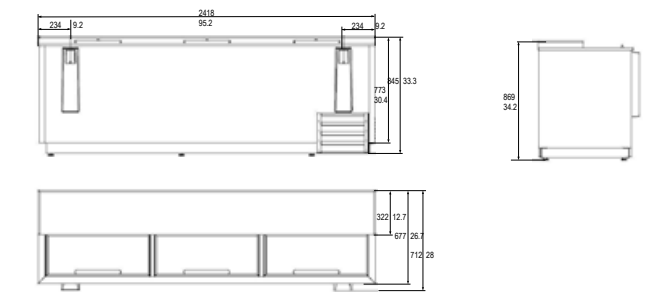

MODEL	LIDS	DIMENSIONS	CAPACITY		HP	AMPS	VOLTAGE	PLUG TYPE
			12 oz. Blts	12 oz. Cans				
HDSBC-26	1	26 3/8 x 28 3/8 x 34 1/4 in 670 x 713 x 869 mm	4.5 cases	6 cases	1/6	2.04	115/60/1	NEMA 5-15P
HDSBC-49	2	49 1/2 x 26 5/8 x 34 1/4 in 1257 x 713 x 869 mm	16.5 cases	24 cases	1/6	2.28	115/60/1	NEMA 5-15P
HDSBC-64	2	64 1/2 x 26 5/8 x 34 1/4 in 1638 x 713 x 869 mm	22 cases	32 cases	1/6	2.6	115/60/1	NEMA 5-15P
HDSBC-95	3	95 1/5 x 26 5/8 x 34 1/4 in 2418 x 713 x 869 mm	37.5 cases	55 cases	1/4+	4.2	115/60/1	NEMA 5-15P

sales@heavydutysystems.com

Voltage 220/50/1 available.