

NW 1008 XSafe

Modular Ice Machine 485 kg

Item #:
Project:
Quantity:



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



NW 1008
Dice 10 g
W 22 x D 22 x H 22 mm



NW H 1008
Half Dice 6 g
W 10 x D 22 x H 28 mm



NW L 1008
Large Dice 15 g
W 28 x D 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Remote condenser
Water cooled

REFRIGERANT GAS

R404A
R452A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

RECOMMENDED BINS

Head	Bins		kg
NW 1008	✓	SB393	181
	✓	SB530	243
	CBT48EAMCD CBT48FMCD	SB948	406
	CBT52EAMCD	SB1025	478
	●	UBH1100	553
	●	UBH1600	812

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com


Modular Ice Machine 485 kg

NW 1008 *XSafe*

Modular Ice Machine 485 kg

Item #:
Project:
Quantity:

Modular Ice Machine 485 kg

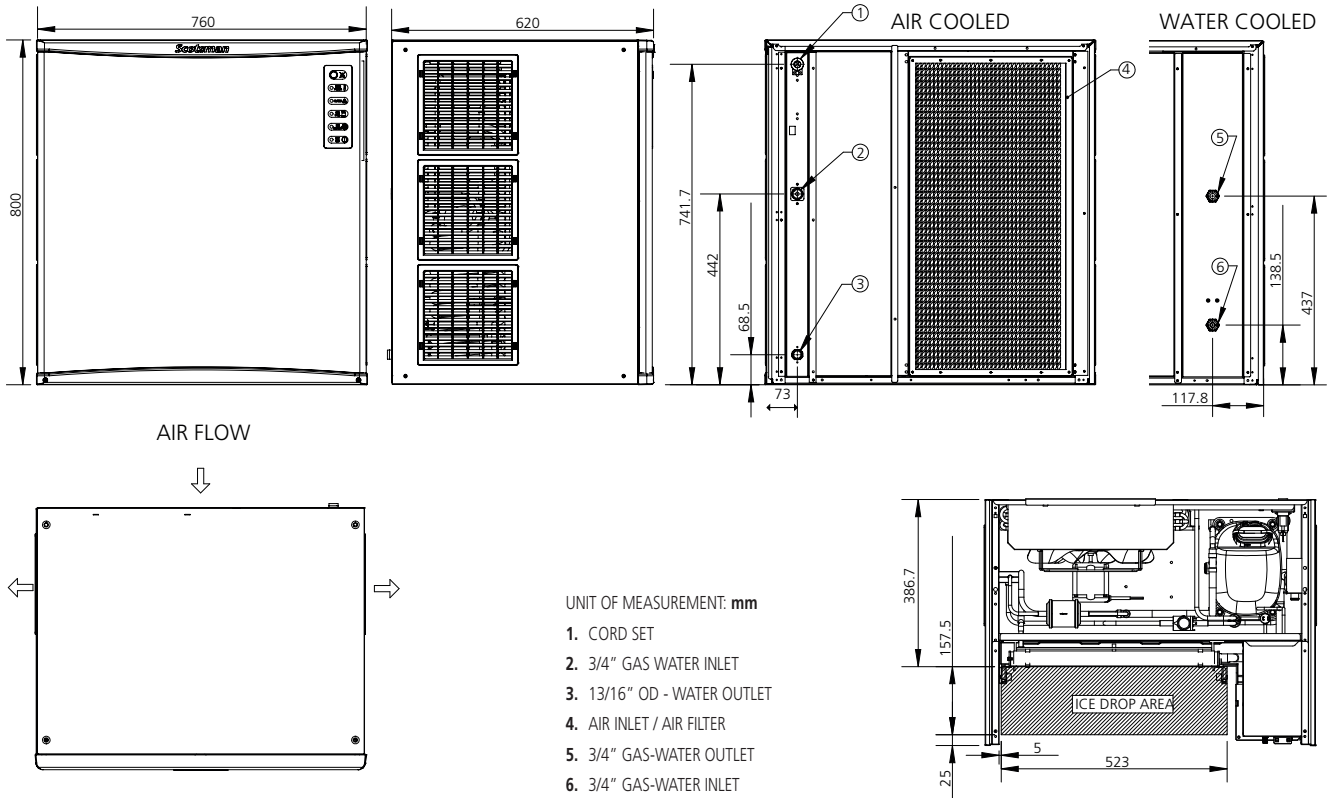

UNIT DATA		SHIPPING DATA		(*) Data refer to 32°C Amb. / 21°C Water temperature conditions									
Size (W x D x H)		760 x 620 x 800 mm		Carton (W x D x H)		830 x 690 x 990 mm							
Net weight		105 kg		Weight		122 kg							
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size		
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm ²	A		
NWH 1008 AS	230/50/1	485	456	380	13.2	50.3	22.3	2500	7300	3 x 2.5	30		
NWH 1008 ASR	230/50/1	475	470	420	14.1	59.2	25.5	2500	7300	3 x 2.5	30		
NWH 1008 WS	230/50/1	460	460	410	12.1	49.7	173.2	2500	7300	3 x 2.5	30		
NWL 1008 AS	230/50/1	485	456	380	13.2	50.3	22.3	2500	7300	3 x 2.5	30		
NWL 1008 ASR	230/50/1	465	470	420	12.8	53.7	25.1	2500	7300	3 x 2.5	30		
NWL 1008 WS	230/50/1	460	450	400	12.1	48.5	169.0	2500	7300	3 x 2.5	30		
NW 1008 AS	230/50/1	485	456	380	13.1	49.9	22.3	2500	7300	3 x 2.5	30		
NW 1008 ASR	230/50/1	470	470	420	13.1	55.2	24.7	2500	7300	3 x 2.5	30		
NW 1008 WS	230/50/1	460	450	410	12.1	49.7	173.2	2500	7300	3 x 2.5	30		