

Modular Ice Machine 350 kg



Item #:
Project:
Quantity:



FEATURES

- Hermetic compressor. Stainless steel auger and freezing cylinder (evaporator). Equipped with an electronic control board.
- Ice breaker made in specially strengthened alloy, allowing for greater extrusion pressure to deliver a dryer-quality of nugget ice (92% dry).
- Long-lasting stainless steel roller-bearings.
- Double protection electronic rotation sensor and drive coupling on gear motor and gear reducer.
- Low- water sensor protection on refrigeration and gear motor system.
 Optical ice level sensor for machine shut down.
- Stainless steel side panels in scotch-brite finish, with rounded corners for enhanced ease of cleaning and aesthetics.
- Side panels are removable on all four sides to ease maintenance and after-sales service operations.
- PS plastic top cover.

			T				
	MFN S 57 Nugget Small 1 g Ø 11 x H 13 mm	CONDENSING	RECOMMENDED BINS				
		SYSTEM	Head	Bins		kg	
		Air cooled		CBT22EFCD	SB193	129	
		7 til Cooled		CBT22EFCD	SB322	168	
			MFN 57	CBT30EFSD	SB393	181	
		REFRIGERANT		CBT30EFSD	SB530	243	
		GAS		CBT42EFSD	SB550	252	
				CBT48FMCD	SB948	406	
		R290		CBT52FMCD	SB1025	478	
				•	UBH1100	553	
		VOLTAGE		•	UBH1600	812	
		VOLTAGE V/Hz/ph		•	SIS300	137 + 73	
		ν/112/ρΠ		•	SIS700	318 + 73	
		230/50/1	: Ice chute	END: erfect combination between ice maker and bin e chute cut-out performed upon installation xxxxxxxxx : need additional bin top			
CERTIFICATIONS		OP	ODED ATING DEGLUDEMENTS				

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals


www.scotsman-ice.it www.scotsman-ice.com



Scotsman[®] Ice Systems

Modular Ice Machine 350 kg

Item #:
Project:
Quantity:

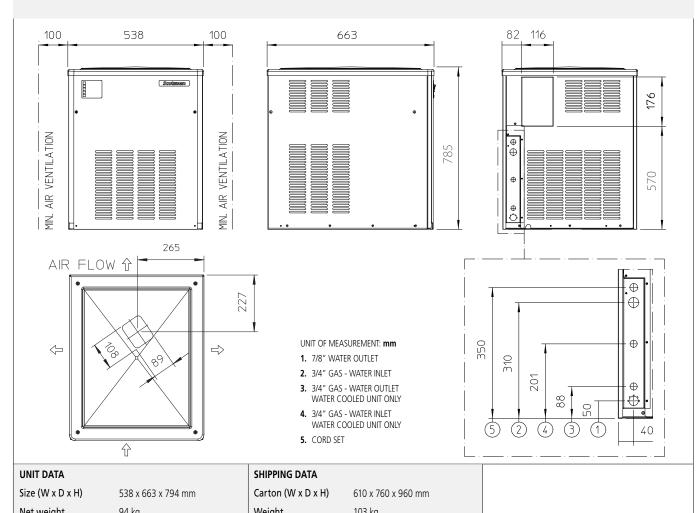

Net weight 94 kg			weight 105 kg								
		24 h ice production kg °C Amb. / °C Water		Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 ka	kWh/ 24h	l/h	w	w	No. x Ømm²	Α
		kg	kg	kg	100 kg	2411					
MFN S57 AS	230/50/1	350	305	235	12.6	29.7	11	1300	3600	3 x 1.5	20

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions