



HDSIFM-660 / HDSIFM-1100 / HDSIFM-1750




HDSIFM-2200 / HDSIFM-2650 / HDSIFM-3300



FLAKE ICE


STANDARD FEATURES

- Intuitive Diagnostics and Controls - For ease of maintenance, a built-in diagnostic system will identify problems that your ice machine may be having and will display the issue on the digital controller so it can be repaired accordingly.
- Stainless Steel Construction - Constructed of durable type 304 stainless steel with a polyethylene interior, HDS ice machines are built to last in the busiest commercial environments. They are also non-corrosive, making them ideal for settings that are high in moisture and humidity.
- Included Ice Scoop & Blue LED Lights - Included with each unit is an ice scoop and a hook to hang it on, so it is always within convenient reach when you need it. Blue LED Lights illuminate the interior of the ice bin, providing a clear view of the ice. This makes it easier to monitor ice levels and scoop out the ice.
- Adjustable Legs - With (4) 6" adjustable legs, you can level your machine on uneven surfaces and have plenty of room to clean under it.
- Side-Breathing with Rear Exhaust - The HDS ice machines are designed for side-breathing and rear exhaust, so you can avoid hot air being blown outward into your kitchen or service area.
- Included Single-Stage Water Filter - Included with each HDS ice machine is a single-stage water filter that will filter contaminants, and ensure your unit produces high quality ice.
- Air Cooled, Self-Contained Condensor
- Refrigerant Options - All models available in R404A refrigerant setup. Select models available in R290 refrigerant setup.
- Electrical Setup Options - All models above with ice production capacity above 500 lbs/24 hrs are available only in 208-240/50 or 60/1. Three-phase electrical setup may be available upon request.

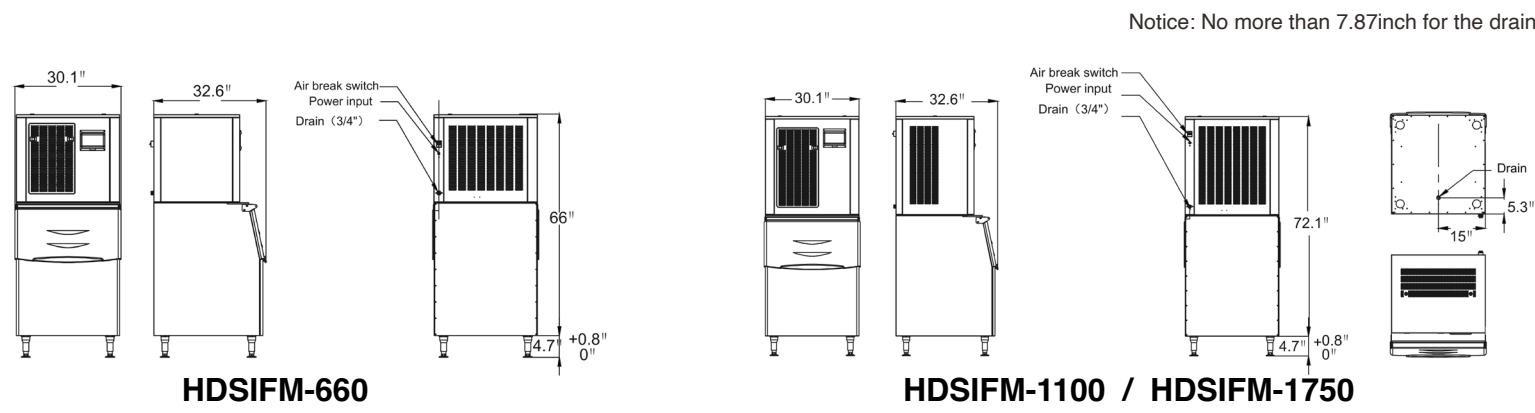

HDSIFM-660

HDSIFM-1100 / HDSIFM-1750

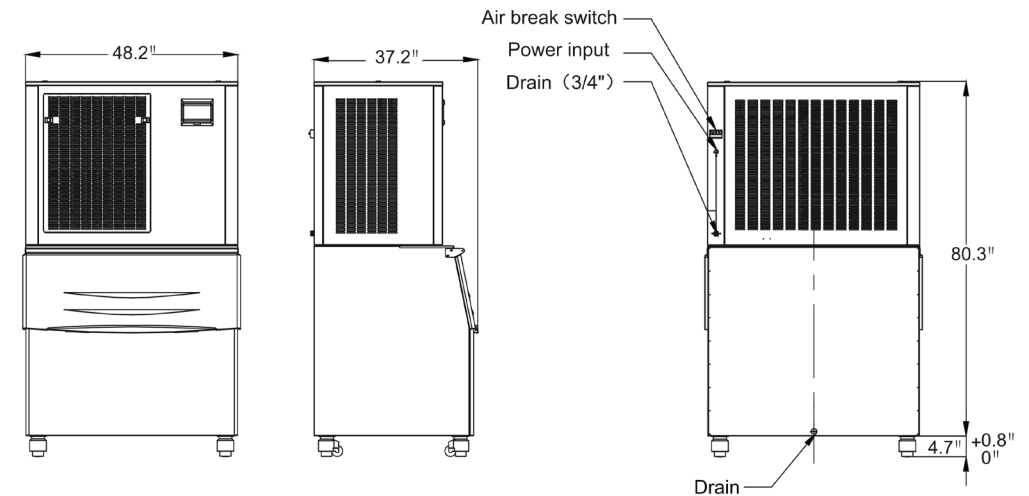

HDSIFM-2200 / HDSIFM-2650 / HDSIFM-3300

MODEL	ICE PRODUCTION	ICE STORAGE	GROSS WEIGHT	POWER	DIMENSION
HDSIFM-660	300kg/660lbs/24h	170kg/375lbs	210kg/463lbs	1414W	764 x 829 x 1795mm / 30.1 x 32.6 x 70.7in
HDSIFM-1100	500kg/1100lbs/24h	170kg/375lbs	283kg/624lbs	1935W	764 x 829 x 1950mm / 30.1 x 32.6 x 76.8in
HDSIFM-1750	800kg/1760lbs/24h	170kg/375lbs	283kg/624lbs	2753W	764 x 829 x 1950mm / 30.1 x 32.6 x 76.8in
HDSIFM-2200	1000kg/2200lbs/24h	350kg/775lbs	380kg/838lbs	4690W	1225 x 945 x 2160mm / 48.2 x 37.2x85in
HDSIFM-2650	1200kg/2645lbs/24h	350kg/775lbs	380kg/838lbs	4690W	1225 x 945 x 2160mm / 48.2 x 37.2 x 85in
HDSIFM-3300	1500kg/3300lbs/24h	350kg/775lbs	380kg/838lbs	5280W	1225 x 945 x 2160mm / 48.2 x 37.2 x 85in

sales@heavydutysystems.com

Ice Production Data at 70°F (21°C) ambient temp. and 50°F (10°C) water temp.